



aircharge®

How To:

Replacing an Orb and/or a
Fixed Tether

Components


Orb

PoD Grub Screw

Security Bit

Fixed Tether Wire


Step 1

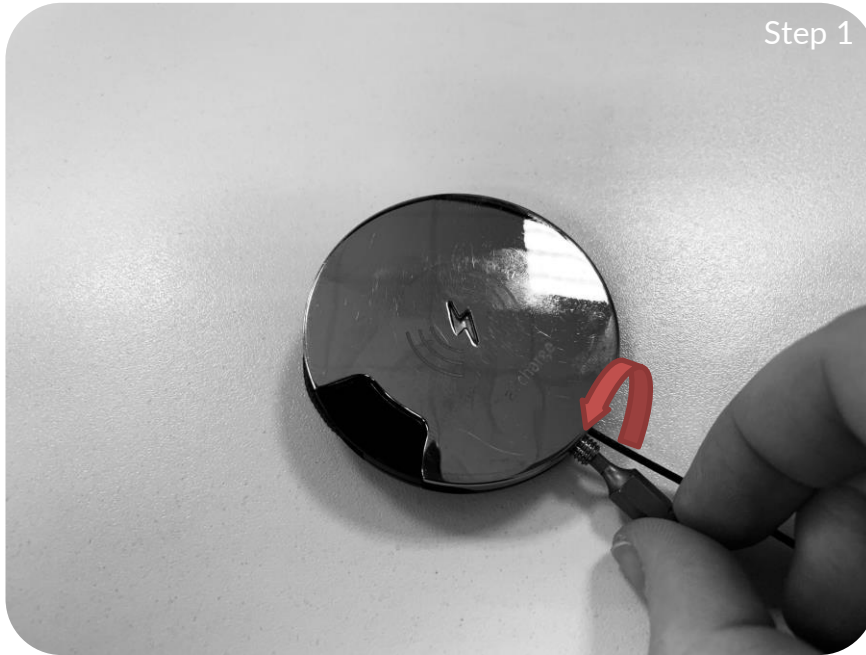

Removing a Broken Orb

Using the 'Security Bit', remove the Grub Screw in the Broken Orb.


Step 2

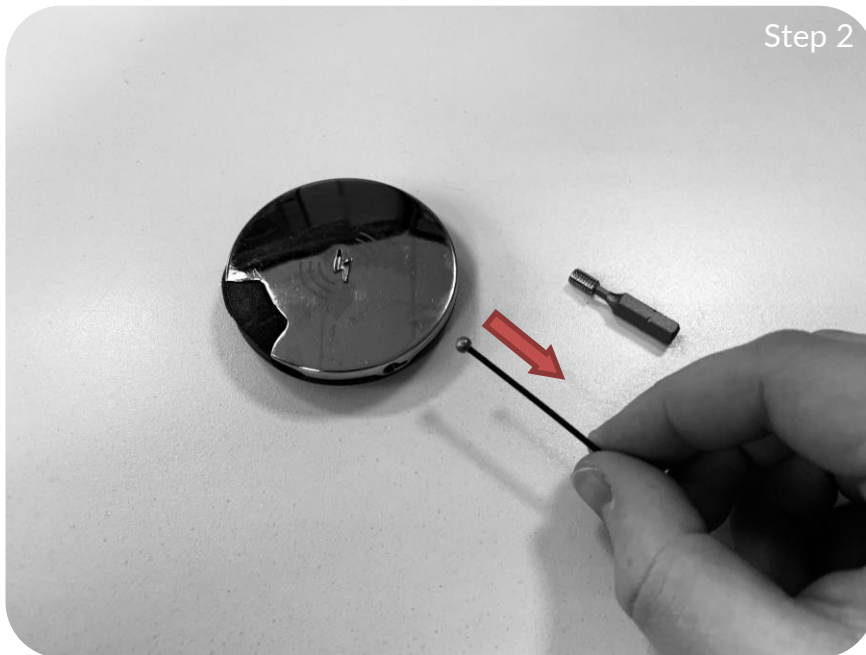


Remove the Fixed Tether's ball joint from the Orb's Grub Screw slot.

Attaching a New Orb

Insert the Fixed Tether's ball joint into the Grub Screw slot of the new Orb.

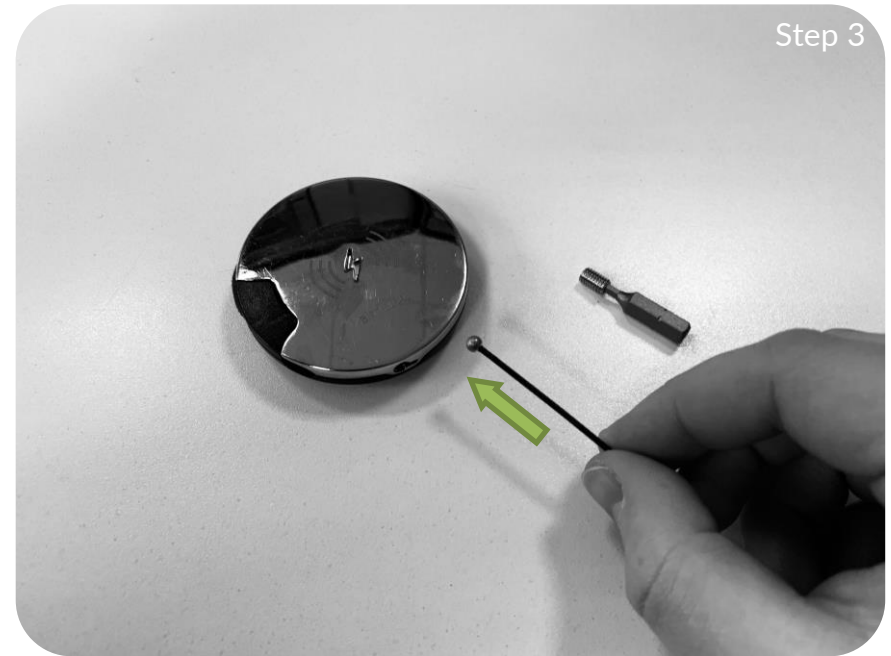

Tighten the Grub Screw to secure the Fixed Tether's ball joint inside the Orb.

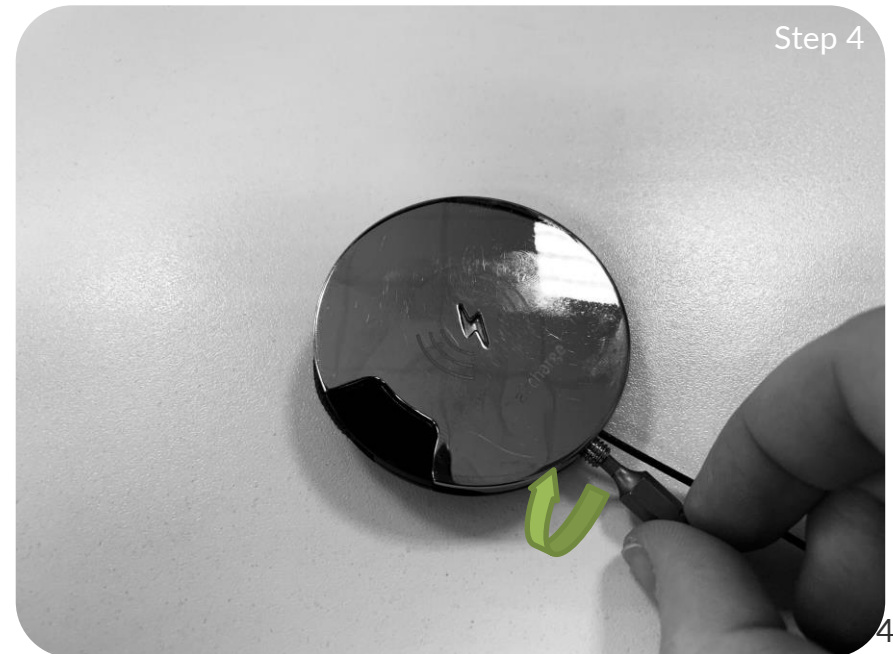


Removing a Broken Tether

Step 5



Using the 'Security Bit', remove the Grub Screw from the PoD.


Step 6

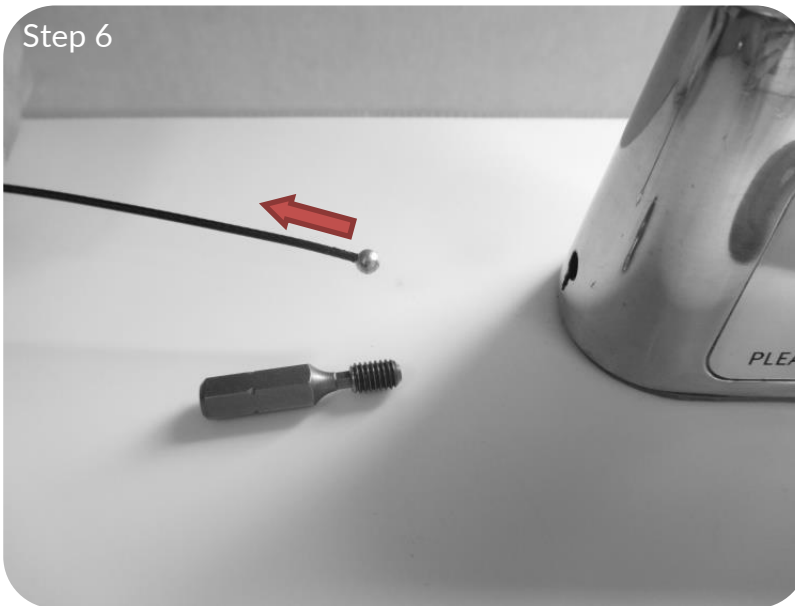

Remove the broken Fixed Tether from the PoD's grub screw slot.

Attaching a New Tether

Insert the new Fixed Tether into the PoD's grub screw slot.

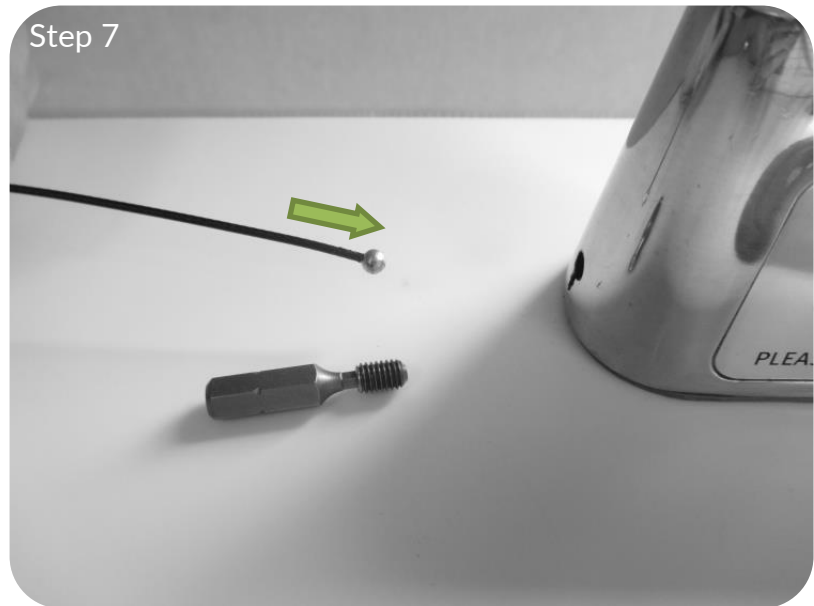

Using the 'Security Bit', tighten the Grub Screw into the PoD, securing the Fixed Tether's ball joint inside.





Thomas Ketterer

Aircharge Partner

Deutschland – Österreich – Schweiz

M DE: 0171 81 68 114

T DE: 09154 911 80 25

T AT: 0720 512 638

T CH: 0325 113 864

W: www.air-charge.de

E: thomas@air-charge.de

Skype: TK-Work